



# HTC Touch Front Buttons Replacement

The goal of this guide is to instruct people on how to properly replace the LCD screen for the HTC Touch 6900.

Written By: Andrew Brooks



## INTRODUCTION

Warning: Always be sure you are grounded whenever handling any of the circuit or logic boards.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Front Buttons



- Remove the back panel by sliding it up.

## Step 2



- Remove the battery.



## Step 3




- Remove the 4 torx-head screws in the corners of the phone using the T5 Torx Screwdriver.

## Step 4




- Use the plastic opening tool to remove the front panel from the phone.
- Unplug the front button cable from the inside of the phone.

## Step 5

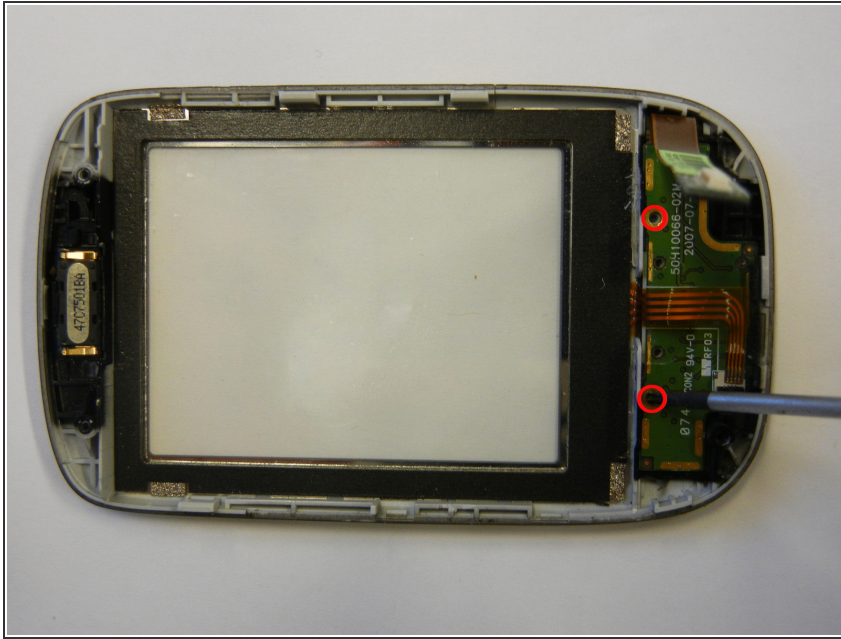

- Remove the 2 philips-head screws on the back of the front panel using the PH00 screwdriver.

## Step 6

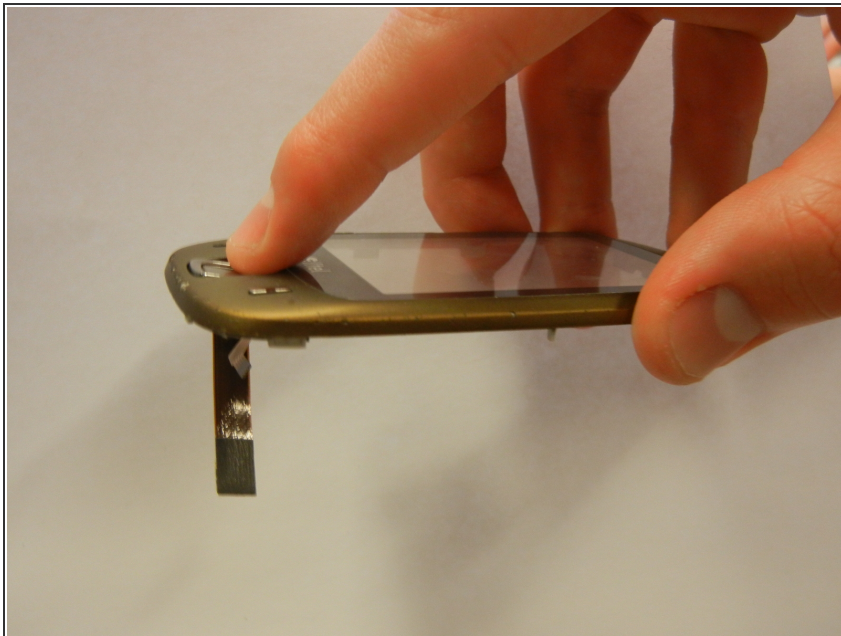

- Remove the small circuit board by gently pushing on the center button on the front of the phone.

## Step 7



- Remove the buttons by pushing on them from the front side of the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 08:52:37 AM.